


サニタリーパイプ

Sanitary Pipe



(単位 mm)		
SIZE	ØD	t
8A	13.8	1.65
10A	17.3	1.65
15A	21.7	2.1
1.0S	25.4	1.2
1.25S	31.8	1.2
1.5S	38.1	1.2
2.0S	50.8	1.5
2.5S	63.5	2.0
3.0S	76.3	2.0
3.5S	89.1	2.0
4.0S	101.6	2.0
4.5S	114.3	3.0
5.5S	139.8	3.0
6.5S	165.2	3.0

- ・材質SUS304/SUS316L ※8A、10A、15Aは、SUS316Lのみ
- ・8A～15AはBA管 外面バフ研磨品

※ご注意
本カタログの記載内容については、改良その他の理由により予告なく変更することがございます。
最新の内容については、お問い合わせください。


サイズ表

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります) ※1.65も対応可能です。
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

溶接式 90° エルボ


90° Elbow both end Weld

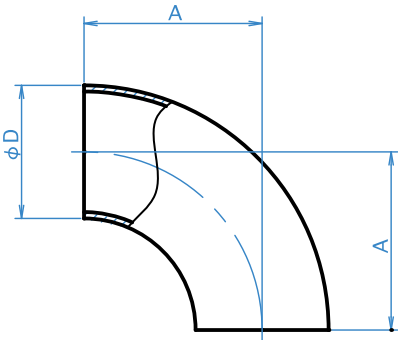

(単位 mm)		
SIZE	ØD	A
8A	13.8	38.0
10A	17.3	38.0
15A	21.7	38.0
1.0S	25.4	34.0
1.25S	31.8	38.0
1.5S	38.1	49.0
2.0S	50.8	61.0
2.5S	63.5	84.0
3.0S	76.3	89.0
3.5S	89.1	103.5
4.0S	101.6	133.4

片ヘルール付 90° エルボ


90° Elbow ends Ferrule / Weld

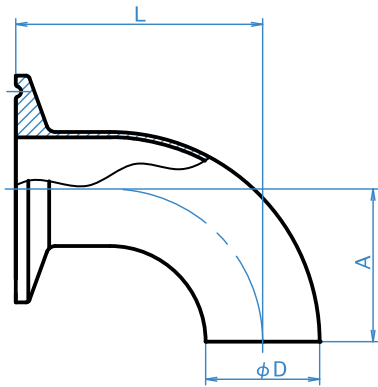

(単位 mm)			
SIZE	ØD	L	A
8A	13.8	55.0	38.0
10A	17.3	55.0	38.0
15A	21.7	55.0	38.0
1.0S	25.4	55.0	34.0
1.25S	31.8	59.5	38.0
1.5S	38.1	70.0	49.0
2.0S	50.8	82.0	61.0
2.5S	63.5	105.0	84.0
3.0S	76.3	110.0	89.0
3.5S	89.1	125.0	103.5
4.0S	101.6	154.4	133.4

両ヘルール付 90° エルボ

90° Elbow both end Ferrule

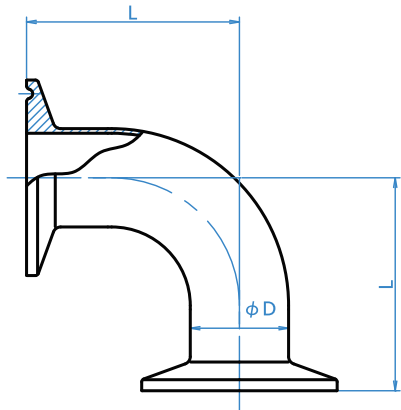

(単位 mm)		
SIZE	ØD	L
8A	13.8	55.0
10A	17.3	55.0
15A	21.7	55.0
1.0S	25.4	55.0
1.25S	31.8	59.5
1.5S	38.1	70.0
2.0S	50.8	82.0
2.5S	63.5	105.0
3.0S	76.3	110.0
3.5S	89.1	125.0
4.0S	101.6	154.4


サイズ表

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります) ※1.65も対応可能です。
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

溶接式 45° エルボ

45° Elbow both end Weld

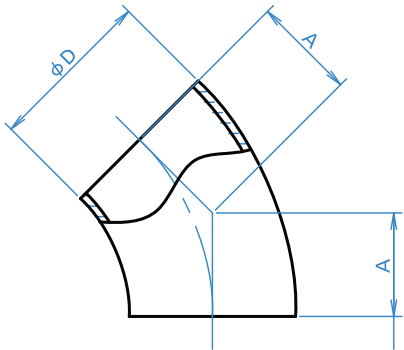


(単位 mm)

SIZE	øD	A
8A	13.8	15.7
10A	17.3	15.7
15A	21.7	15.7
1.0S	25.4	15.8
1.25S	31.8	15.7
1.5S	38.1	23.7
2.0S	50.8	31.6
2.5S	63.5	42.0
3.0S	76.3	52.6
3.5S	89.1	42.9
4.0S	101.6	73.6

片ヘルール付 45° エルボ

45° Elbow ends Ferrule / Weld

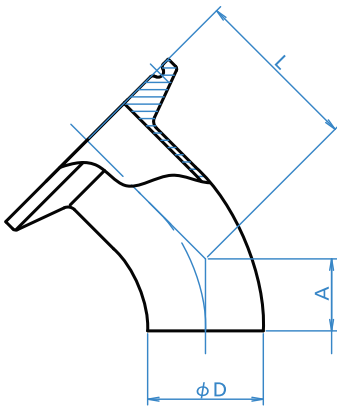


(単位 mm)

SIZE	øD	L	A
8A	13.8	32.7	15.7
10A	17.3	32.7	15.7
15A	21.7	32.7	15.7
1.0S	25.4	36.8	15.8
1.25S	31.8	37.2	15.7
1.5S	38.1	44.7	23.7
2.0S	50.8	52.6	31.6
2.5S	63.5	63.0	42.0
3.0S	76.3	73.6	52.6
3.5S	89.1	64.4	42.9
4.0S	101.6	94.6	73.6

両ヘルール付 45° エルボ

45° Elbow both end Ferrule

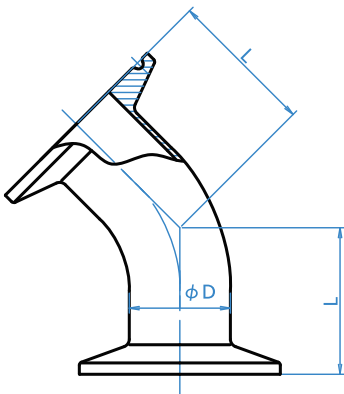

(単位 mm)

SIZE	øD	L
8A	13.8	32.7
10A	17.3	32.7
15A	21.7	32.7
1.0S	25.4	36.8
1.25S	31.8	37.2
1.5S	38.1	44.7
2.0S	50.8	52.6
2.5S	63.5	63.0
3.0S	76.3	73.6
3.5S	89.1	64.4
4.0S	101.6	94.6

サイズ表


(単位 mm)

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

溶接式 180° ベンド

180° Bend both end Weld

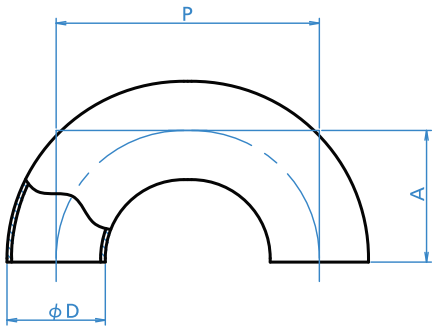


(単位 mm)

SIZE	øD	A	P
1.5S	38.1	76.2	152.4
2.0S	50.8	76.2	152.4
2.5S	63.5	95.3	190.6
3.0S	76.3	127.0	254.0
4.0S	101.6	127.0	254.0

片ヘルール付 180° ベンド

180° Bend ends Ferrule / Weld

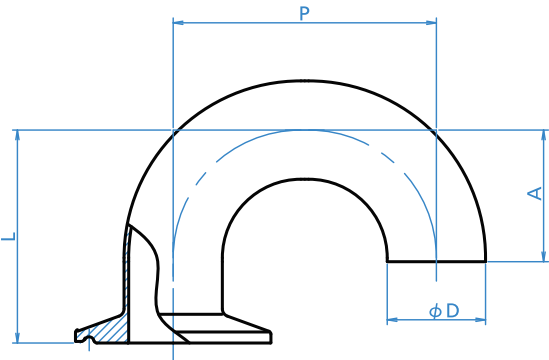


(単位 mm)

SIZE	øD	A	L	P
1.5S	38.1	76.2	97.2	152.4
2.0S	50.8	76.2	97.2	152.4
2.5S	63.5	95.3	116.3	190.6
3.0S	76.3	127.0	148.0	254.0
4.0S	101.6	127.0	148.0	254.0

両ヘルール付 180° ベンド

180° Bend both end Ferrule

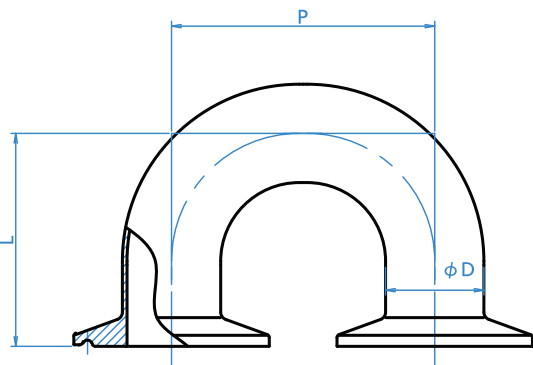

(単位 mm)

SIZE	øD	L	P
1.5S	38.1	97.2	152.4
2.0S	50.8	97.2	152.4
2.5S	63.5	116.3	190.6
3.0S	76.3	148.0	254.0
4.0S	101.6	148.0	254.0

サイズ表


(単位 mm)

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

溶接式 88.5° エルボ


88.5° Elbow both end Weld

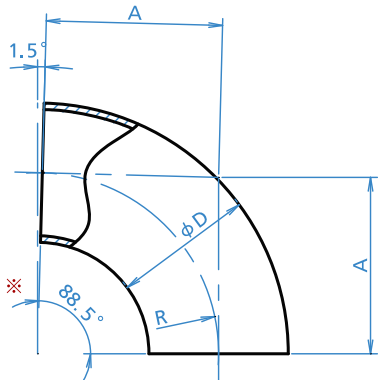

(単位 mm)			
SIZE	ØD	A	R
1.0S	25.4	32.1	33.0
1.5S	38.1	44.3	45.5
2.0S	50.8	56.0	57.5
2.5S	63.5	73.0	75.0
3.0S	76.3	73.0	75.0
4.0S	101.6	129.9	133.4

片ヘルール付 88.5° エルボ

88.5° Elbow ends Ferrule / Weld

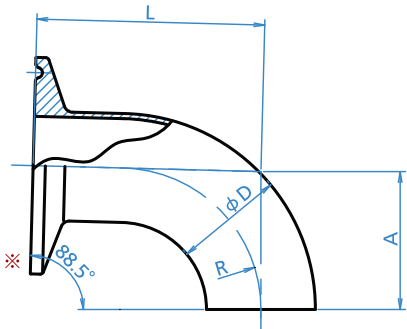


(単位 mm)				
SIZE	ØD	L	A	R
1.0S	25.4	53.1	32.1	33.0
1.5S	38.1	65.3	44.3	45.5
2.0S	50.8	77.0	56.0	57.5
2.5S	63.5	94.0	73.0	75.0
3.0S	76.3	94.0	73.0	75.0
4.0S	101.6	150.9	129.9	133.4

※溶接式エルボ同様、垂直に対し-1.5°の傾きがあります。

両ヘルール付 88.5° エルボ

88.5° Elbow both end Ferrule

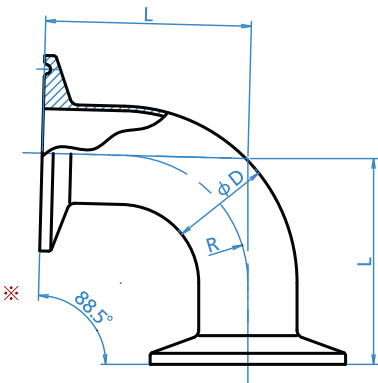

(単位 mm)			
SIZE	ØD	L	R
1.0S	25.4	53.1	33.0
1.5S	38.1	65.3	45.5
2.0S	50.8	77.0	57.5
2.5S	63.5	94.0	75.0
3.0S	76.3	94.0	75.0
4.0S	101.6	150.9	133.4

※溶接式エルボ同様、垂直に対し-1.5°の傾きがあります。

サイズ表


(単位 mm)													
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

※1.65も対応可能です。

溶接式 91.5° エルボ


91.5° Elbow both end Weld



(単位 mm)			
SIZE	ØD	A	R
1.0S	25.4	33.8	33.0
1.5S	38.1	46.7	45.5
2.0S	50.8	59.0	57.5
2.5S	63.5	76.9	75.0
3.0S	76.3	76.9	75.0
4.0S	101.6	136.9	133.4

片ヘルール付 91.5° エルボ

91.5° Elbow ends Ferrule / Weld

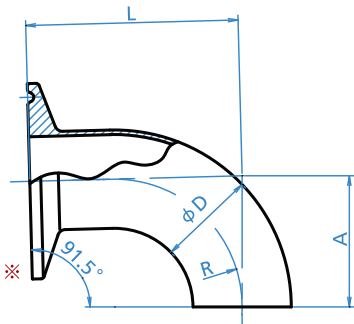


(単位 mm)				
SIZE	ØD	L	A	R
1.0S	25.4	54.8	33.8	33.0
1.5S	38.1	67.7	46.7	45.5
2.0S	50.8	80.0	59.0	57.5
2.5S	63.5	97.9	76.9	75.0
3.0S	76.3	97.9	76.9	75.0
4.0S	101.6	157.9	136.9	133.4

※溶接式エルボ同様、垂直に対し+1.5°の傾きがあります。

両ヘルール付 91.5° エルボ

91.5° Elbow both end Ferrule

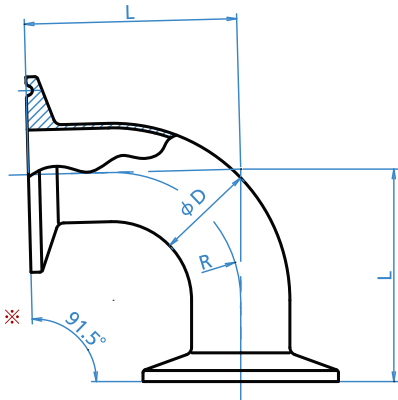

(単位 mm)			
SIZE	ØD	L	R
1.0S	25.4	54.8	33.0
1.5S	38.1	67.7	45.5
2.0S	50.8	80.0	57.5
2.5S	63.5	97.9	75.0
3.0S	76.3	97.9	75.0
4.0S	101.6	157.9	133.4

※溶接式エルボ同様、垂直に対し+1.5°の傾きがあります。

サイズ表


(単位 mm)													
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

※1.65も対応可能です。

溶接式 同径 TEE


Tee ends Weld

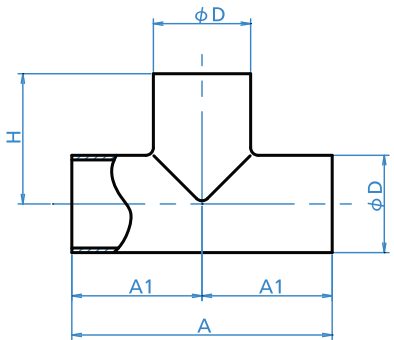

(単位 mm)				
SIZE	ØD	A	A1	H
8A	13.8	76.0	38.0	38.0
10A	17.3	76.0	38.0	38.0
15A	21.7	76.0	38.0	38.0
1.0S	25.4	68.0	34.0	34.0
1.25S	31.8	76.0	38.0	38.0
1.5S	38.1	98.0	49.0	49.0
2.0S	50.8	122.0	61.0	61.0
2.5S	63.5	168.0	84.0	84.0
3.0S	76.3	178.0	89.0	89.0
3.5S	89.1	207.0	103.5	103.5
4.0S	101.6	266.8	133.4	133.4

溶接式 異径 TEE

Reducing Tee ends Weld

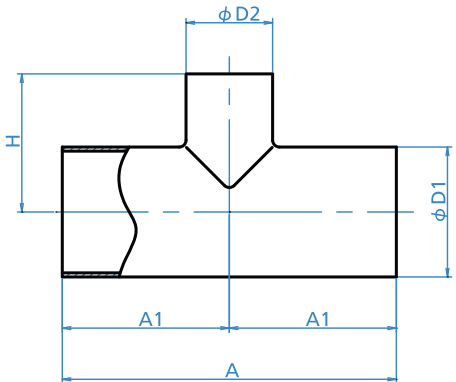

(単位 mm)					
SIZE	ØD1	ØD2	A	A1	H
10A×8A	17.3	13.8	76.0	38.0	38.0
15A×8A	21.7	13.8	76.0	38.0	38.0
15A×10A	21.7	17.3	76.0	38.0	38.0
1.0S×8A	25.4	13.8	68.0	34.0	38.0
1.0S×10A	25.4	17.3	68.0	34.0	38.0
1.0S×15A	25.4	21.7	68.0	34.0	38.0
1.25S×1.0S	31.8	25.4	76.0	38.0	37.5
1.5S×1.0S	38.1	25.4	98.0	49.0	40.5
1.5S×1.25S	38.1	31.8	98.0	49.0	41.0
2.0S×1.0S	50.8	25.4	122.0	61.0	48.5
2.0S×1.25S	50.8	31.8	122.0	61.0	49.0
2.0S×1.5S	50.8	38.1	122.0	61.0	57.0
2.5S×1.0S	63.5	25.4	168.0	84.0	54.5
2.5S×1.25S	63.5	31.8	168.0	84.0	55.0
2.5S×1.5S	63.5	38.1	168.0	84.0	63.0
2.5S×2.0S	63.5	50.8	168.0	84.0	67.0
3.0S×1.0S	76.3	25.4	178.0	89.0	62.0
3.0S×1.25S	76.3	31.8	178.0	89.0	62.5
3.0S×1.5S	76.3	38.1	178.0	89.0	70.5
3.0S×2.0S	76.3	50.8	178.0	89.0	74.5
3.0S×2.5S	76.3	63.5	178.0	89.0	91.5
3.5S×1.0S	89.1	25.4	207.0	103.5	69.5
3.5S×1.25S	89.1	31.8	207.0	103.5	70.0
3.5S×1.5S	89.1	38.1	207.0	103.5	78.0
3.5S×2.0S	89.1	50.8	207.0	103.5	82.0
3.5S×2.5S	89.1	63.5	207.0	103.5	99.0
3.5S×3.0S	89.1	76.3	207.0	103.5	96.5
4.0S×1.0S	101.6	25.4	266.8	133.4	74.5
4.0S×1.25S	101.6	31.8	266.8	133.4	75.0
4.0S×1.5S	101.6	38.1	266.8	133.4	83.0
4.0S×2.0S	101.6	50.8	266.8	133.4	87.0
4.0S×2.5S	101.6	63.5	266.8	133.4	104.0
4.0S×3.0S	101.6	76.3	266.8	133.4	101.5
4.0S×3.5S	101.6	89.1	266.8	133.4	108.5

サイズ表

(単位 mm)													
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0


材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)

表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

※1.65も対応可能です。

溶接式 同径ローネック TEE


Tee ends Weld (Low Neck)

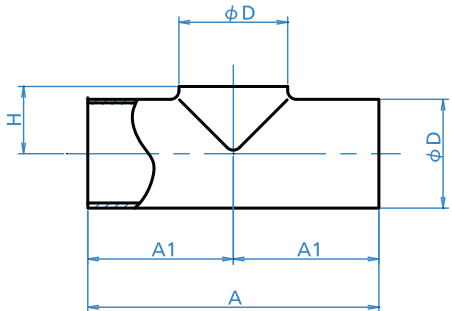

(単位 mm)				
SIZE	ØD	A	A1	H
8A	13.8	76.0	38.0	7.5
10A	17.3	76.0	38.0	9.5
15A	21.7	76.0	38.0	12.5
1.0S	25.4	68.0	34.0	14.5
1.25S	31.8	76.0	38.0	18.0
1.5S	38.1	98.0	49.0	21.0
2.0S	50.8	122.0	61.0	29.0
2.5S	63.5	168.0	84.0	35.0
3.0S	76.3	178.0	89.0	42.5
3.5S	89.1	207.0	103.5	50.0
4.0S	101.6	266.8	133.4	55.0

溶接式 異径ローネック TEE

Reducing Tee ends Weld (Low Neck)

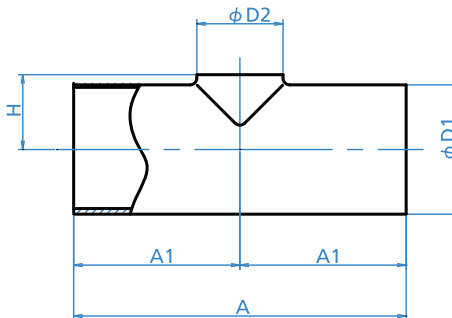

(単位 mm)					
SIZE	ØD1	ØD2	A	A1	H
10A×8A	17.3	13.8	76.0	38.0	9.5
15A×8A	21.7	13.8	76.0	38.0	12.5
15A×10A	21.7	17.3	76.0	38.0	12.5
1.0S×8A	25.4	13.8	68.0	34.0	14.5
1.0S×10A	25.4	17.3	68.0	34.0	15.0
1.0S×15A	25.4	21.7	68.0	34.0	15.0
1.25S×1.0S	31.8	25.4	76.0	38.0	18.0
1.5S×1.0S	38.1	25.4	98.0	49.0	21.0
1.5S×1.25S	38.1	31.8	98.0	49.0	21.0
2.0S×1.0S	50.8	25.4	122.0	61.0	29.0
2.0S×1.25S	50.8	31.8	122.0	61.0	29.0
2.0S×1.5S	50.8	38.1	122.0	61.0	29.0
2.5S×1.0S	63.5	25.4	168.0	84.0	35.0
2.5S×1.25S	63.5	31.8	168.0	84.0	35.0
2.5S×1.5S	63.5	38.1	168.0	84.0	35.0
2.5S×2.0S	63.5	50.8	168.0	84.0	35.0
3.0S×1.0S	76.3	25.4	178.0	89.0	42.5
3.0S×1.25S	76.3	31.8	178.0	89.0	42.5
3.0S×1.5S	76.3	38.1	178.0	89.0	42.5
3.0S×2.0S	76.3	50.8	178.0	89.0	42.5
3.0S×2.5S	76.3	63.5	178.0	89.0	42.5
3.5S×1.0S	89.1	25.4	207.0	103.5	50.0
3.5S×1.25S	89.1	31.8	207.0	103.5	50.0
3.5S×1.5S	89.1	38.1	207.0	103.5	50.0
3.5S×2.0S	89.1	50.8	207.0	103.5	50.0
3.5S×2.5S	89.1	63.5	207.0	103.5	50.0
3.5S×3.0S	89.1	76.3	207.0	103.5	50.0
4.0S×1.0S	101.6	25.4	266.8	133.4	55.0
4.0S×1.25S	101.6	31.8	266.8	133.4	55.0
4.0S×1.5S	101.6	38.1	266.8	133.4	55.0
4.0S×2.0S	101.6	50.8	266.8	133.4	55.0
4.0S×2.5S	101.6	63.5	266.8	133.4	55.0
4.0S×3.0S	101.6	76.3	266.8	133.4	55.0
4.0S×3.5S	101.6	89.1	266.8	133.4	55.0

サイズ表

(単位 mm)													
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0


材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)

表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させていただきます。

※1.65も対応可能です。

ヘルール付 TEE

Tee ends Ferrule

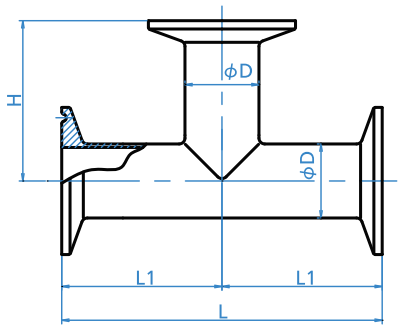


※ 1 方向、2 方向ヘルール付も製作致します。

(単位 mm)

SIZE	ØD	L	L1	H
8A	13.8	110.0	55.0	55.0
10A	17.3	110.0	55.0	55.0
15A	21.7	110.0	55.0	55.0
1.0S	25.4	110.0	55.0	55.0
1.25S	31.8	119.0	59.5	59.5
1.5S	38.1	140.0	70.0	70.0
2.0S	50.8	164.0	82.0	82.0
2.5S	63.5	210.0	105.0	105.0
3.0S	76.3	220.0	110.0	110.0
3.5S	89.1	250.0	125.0	125.0
4.0S	101.6	308.8	154.4	154.4

ヘルール付異径 TEE

Reducing Tee ends Ferrule

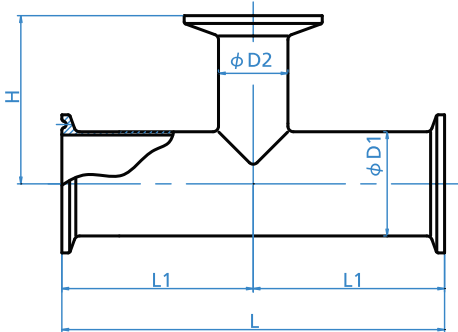

※ 1 方向、2 方向ヘルール付も製作致します。

(単位 mm)

SIZE	ØD1	ØD2	L	L1	H
10A×8A	17.3	13.8	110.0	55.0	55.0
15A×8A	21.7	13.8	110.0	55.0	55.0
15A×10A	21.7	17.3	110.0	55.0	55.0
1.0S×8A	25.4	13.8	110.0	55.0	55.0
1.0S×10A	25.4	17.3	110.0	55.0	55.0
1.0S×15A	25.4	21.7	110.0	55.0	55.0
1.25S×1.0S	31.8	25.4	119.0	59.5	58.5
1.5S×1.0S	38.1	25.4	140.0	70.0	61.5
1.5S×1.25S	38.1	31.8	140.0	70.0	62.5
2.0S×1.0S	50.8	25.4	164.0	82.0	69.5
2.0S×1.25S	50.8	31.8	164.0	82.0	70.5
2.0S×1.5S	50.8	38.1	164.0	82.0	78.0
2.5S×1.0S	63.5	25.4	210.0	105.0	75.5
2.5S×1.25S	63.5	31.8	210.0	105.0	76.5
2.5S×1.5S	63.5	38.1	210.0	105.0	84.0
2.5S×2.0S	63.5	50.8	210.0	105.0	88.0
3.0S×1.0S	76.3	25.4	220.0	110.0	83.0
3.0S×1.25S	76.3	31.8	220.0	110.0	84.0
3.0S×1.5S	76.3	38.1	220.0	110.0	91.5
3.0S×2.0S	76.3	50.8	220.0	110.0	95.5
3.0S×2.5S	76.3	63.5	220.0	110.0	112.5
3.5S×1.0S	89.1	25.4	250.0	125.0	90.5
3.5S×1.25S	89.1	31.8	250.0	125.0	91.5
3.5S×1.5S	89.1	38.1	250.0	125.0	99.0
3.5S×2.0S	89.1	50.8	250.0	125.0	103.0
3.5S×2.5S	89.1	63.5	250.0	125.0	120.0
3.5S×3.0S	89.1	76.3	250.0	125.0	117.5
4.0S×1.0S	101.6	25.4	308.8	154.4	95.5
4.0S×1.25S	101.6	31.8	308.8	154.4	96.5
4.0S×1.5S	101.6	38.1	308.8	154.4	104.0
4.0S×2.0S	101.6	50.8	308.8	154.4	108.0
4.0S×2.5S	101.6	63.5	308.8	154.4	125.0
4.0S×3.0S	101.6	76.3	308.8	154.4	122.5
4.0S×3.5S	101.6	89.1	308.8	154.4	130.0

サイズ表


(単位 mm)

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1/(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります) ※1.65も対応可能です。
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させて頂きます。

溶接式 クロス

Cross ends Weld

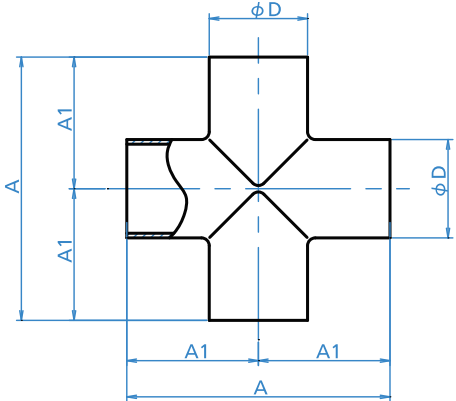


※異径クロスも製作致します。

(単位 mm)

SIZE	ØD	A	A1
8A	13.8	76.0	38.0
10A	17.3	76.0	38.0
15A	21.7	76.0	38.0
1.0S	25.4	68.0	34.0
1.25S	31.8	76.0	38.0
1.5S	38.1	98.0	49.0
2.0S	50.8	122.0	61.0
2.5S	63.5	168.0	84.0
3.0S	76.3	178.0	89.0
3.5S	89.1	207.0	103.5
4.0S	101.6	266.8	133.4

ヘルール付 クロス

Cross ends Ferrule

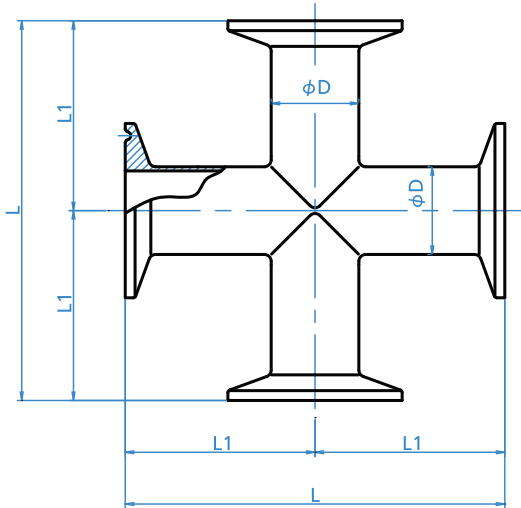

※異径クロスも製作致します。
※ 1 方向、2 方向、3 方向ヘルール付も製作致します。

(単位 mm)

SIZE	ØD	L	L1
8A	13.8	110.0	55.0
10A	17.3	110.0	55.0
15A	21.7	110.0	55.0
1.0S	25.4	110.0	55.0
1.25S	31.8	119.0	59.5
1.5S	38.1	140.0	70.0
2.0S	50.8	164.0	82.0
2.5S	63.5	210.0	105.0
3.0S	76.3	220.0	110.0
3.5S	89.1	250.0	125.0
4.0S	101.6	308.8	154.4

サイズ表


(単位 mm)

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1/(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります) ※1.65も対応可能です。
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させて頂きます。

溶接式 同芯レデューサー

Reducer both end Weld (Concentric)

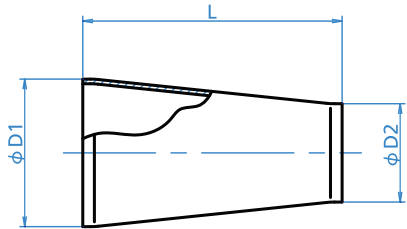


※寸法表以外のサイズも製作致します。

(単位 mm)			
SIZE	ØD1	ØD2	L
10A×8A	17.3	13.8	38.1
15A×8A	21.7	13.8	38.1
15A×10A	21.7	17.3	38.1
1.0S×8A	25.4	13.8	38.1
1.0S×10A	25.4	17.3	38.1
1.0S×15A	25.4	21.7	38.1
1.25S×1.0S	31.8	25.4	67.0
1.5S×1.0S	38.1	25.4	67.0
1.5S×1.25S	38.1	31.8	67.0
2.0S×1.0S	50.8	25.4	67.0
2.0S×1.25S	50.8	31.8	67.0
2.0S×1.5S	50.8	38.1	67.0
2.5S×1.0S	63.5	25.4	67.0
2.5S×1.25S	63.5	31.8	67.0
2.5S×1.5S	63.5	38.1	67.0
2.5S×2.0S	63.5	50.8	67.0
3.0S×1.5S	76.3	38.1	67.0
3.0S×2.0S	76.3	50.8	67.0
3.0S×2.5S	76.3	63.5	67.0
3.5S×2.0S	89.1	50.8	67.0
3.5S×2.5S	89.1	63.5	67.0
3.5S×3.0S	89.1	76.3	67.0
4.0S×2.0S	101.6	50.8	102.0
4.0S×2.5S	101.6	63.5	102.0
4.0S×3.0S	101.6	76.3	102.0
4.0S×3.5S	101.6	89.1	102.0

ヘルール付 同芯レデューサー

Reducer both end Ferrule (Concentric)

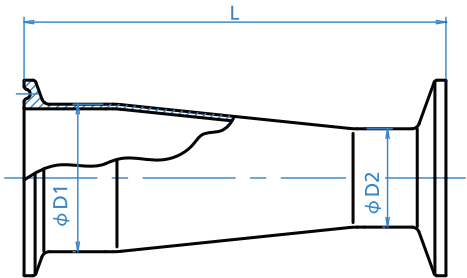

※寸法表以外のサイズも製作致します。

(単位 mm)			
SIZE	ØD1	ØD2	L
10A×8A	17.3	13.8	72.1
15A×8A	21.7	13.8	72.1
15A×10A	21.7	17.3	72.1
1.0S×8A	25.4	13.8	76.1
1.0S×10A	25.4	17.3	76.1
1.0S×15A	25.4	21.7	76.1
1.25S×1.0S	31.8	25.4	109.5
1.5S×1.0S	38.1	25.4	109.0
1.5S×1.25S	38.1	31.8	109.0
2.0S×1.0S	50.8	25.4	109.0
2.0S×1.25S	50.8	31.8	109.5
2.0S×1.5S	50.8	38.1	109.0
2.5S×1.0S	63.5	25.4	109.0
2.5S×1.25S	63.5	31.8	109.5
2.5S×1.5S	63.5	38.1	109.0
2.5S×2.0S	63.5	50.8	109.0
3.0S×1.5S	76.3	38.1	109.0
3.0S×2.0S	76.3	50.8	109.0
3.0S×2.5S	76.3	63.5	109.0
3.5S×2.0S	89.1	50.8	109.5
3.5S×2.5S	89.1	63.5	109.5
3.5S×3.0S	89.1	76.3	109.5
4.0S×2.0S	101.6	50.8	144.0
4.0S×2.5S	101.6	63.5	144.0
4.0S×3.0S	101.6	76.3	144.0
4.0S×3.5S	101.6	89.1	144.5

サイズ表


(単位 mm)													
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP (電解研磨品) / 酸洗品もご用意させて頂きます。

※1.65も対応可能です。

片ヘルール付 同芯レデューサー

Reducer ends Ferrule / Weld (Concentric)

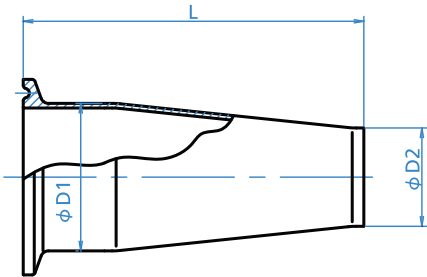


※寸法表以外のサイズも製作致します。

(単位 mm)			
SIZE	ØD1	ØD2	L
10A×8A	17.3	13.8	55.1
15A×8A	21.7	13.8	55.1
15A×10A	21.7	17.3	55.1
1.0S×8A	25.4	13.8	59.1
1.0S×10A	25.4	17.3	59.1
1.0S×15A	25.4	21.7	59.1
1.25S×1.0S	31.8	25.4	88.5
1.5S×1.0S	38.1	25.4	88.0
1.5S×1.25S	38.1	31.8	88.0
2.0S×1.0S	50.8	25.4	88.0
2.0S×1.25S	50.8	31.8	88.0
2.0S×1.5S	50.8	38.1	88.0
2.5S×1.0S	63.5	25.4	88.0
2.5S×1.25S	63.5	31.8	88.0
2.5S×1.5S	63.5	38.1	88.0
2.5S×2.0S	63.5	50.8	88.0
3.0S×1.5S	76.3	38.1	88.0
3.0S×2.0S	76.3	50.8	88.0
3.0S×2.5S	76.3	63.5	88.0
3.5S×2.0S	89.1	50.8	88.5
3.5S×2.5S	89.1	63.5	88.5
3.5S×3.0S	89.1	76.3	88.5
4.0S×2.0S	101.6	50.8	123.0
4.0S×2.5S	101.6	63.5	123.0
4.0S×3.0S	101.6	76.3	123.0
4.0S×3.5S	101.6	89.1	123.0

片ヘルール付 同芯レデューサー

Reducer ends Weld / Ferrule (Concentric)

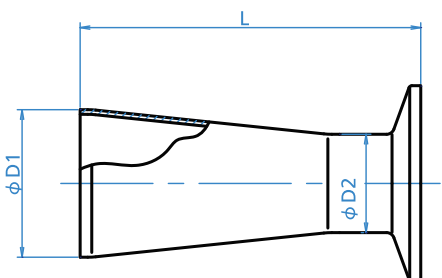

※寸法表以外のサイズも製作致します。

(単位 mm)			
SIZE	ØD1	ØD2	L
10A×8A	17.3	13.8	55.1
15A×8A	21.7	13.8	55.1
15A×10A	21.7	17.3	55.1
1.0S×8A	25.4	13.8	55.1
1.0S×10A	25.4	17.3	55.1
1.0S×15A	25.4	21.7	55.1
1.25S×1.0S	31.8	25.4	88.0
1.5S×1.0S	38.1	25.4	88.0
1.5S×1.25S	38.1	31.8	88.5
2.0S×1.0S	50.8	25.4	88.0
2.0S×1.25S	50.8	31.8	88.0
2.0S×1.5S	50.8	38.1	88.0
2.5S×1.0S	63.5	25.4	88.0
2.5S×1.25S	63.5	31.8	88.5
2.5S×1.5S	63.5	38.1	88.0
2.5S×2.0S	63.5	50.8	88.0
3.0S×1.5S	76.3	38.1	88.0
3.0S×2.0S	76.3	50.8	88.0
3.0S×2.5S	76.3	63.5	88.0
3.5S×2.0S	89.1	50.8	88.0
3.5S×2.5S	89.1	63.5	88.0
3.5S×3.0S	89.1	76.3	88.0
4.0S×2.0S	101.6	50.8	123.0
4.0S×2.5S	101.6	63.5	123.0
4.0S×3.0S	101.6	76.3	123.0
4.0S×3.5S	101.6	89.1	123.5

サイズ表


(単位 mm)													
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP (電解研磨品) / 酸洗品もご用意させて頂きます。

※1.65も対応可能です。

溶接式 偏芯レデューサー

Reducer both end Weld (Eccentric)

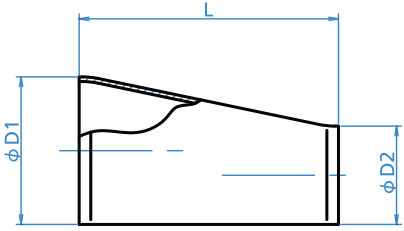


※ 寸法表以外のサイズも製作致します。

SIZE	Ø D1	Ø D2	L
10A × 8A	17.3	13.8	38.1
15A × 8A	21.7	13.8	38.1
15A × 10A	21.7	17.3	38.1
1.0S × 8A	25.4	13.8	38.1
1.0S × 10A	25.4	17.3	38.1
1.0S × 15A	25.4	21.7	38.1
1.25S × 1.0S	31.8	25.4	67.0
1.5S × 1.0S	38.1	25.4	67.0
1.5S × 1.25S	38.1	31.8	67.0
2.0S × 1.0S	50.8	25.4	67.0
2.0S × 1.25S	50.8	31.8	67.0
2.0S × 1.5S	50.8	38.1	67.0
2.5S × 1.0S	63.5	25.4	67.0
2.5S × 1.25S	63.5	31.8	67.0
2.5S × 1.5S	63.5	38.1	67.0
2.5S × 2.0S	63.5	50.8	67.0
3.0S × 1.5S	76.3	38.1	67.0
3.0S × 2.0S	76.3	50.8	67.0
3.0S × 2.5S	76.3	63.5	67.0
3.5S × 2.0S	89.1	50.8	67.0
3.5S × 2.5S	89.1	63.5	67.0
3.5S × 3.0S	89.1	76.3	67.0
4.0S × 2.0S	101.6	50.8	102.0
4.0S × 2.5S	101.6	63.5	102.0
4.0S × 3.0S	101.6	76.3	102.0
4.0S × 3.5S	101.6	89.1	102.0

ヘルール付 偏芯レデューサー

Reducer both end Ferrule (Eccentric)

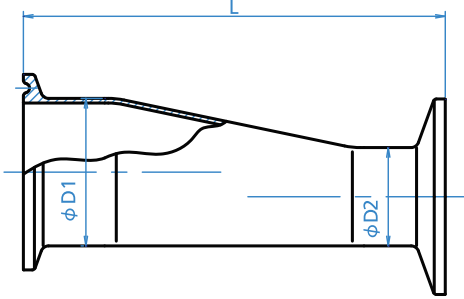

※ 寸法表以外のサイズも製作致します。

SIZE	Ø D1	Ø D2	L
10A × 8A	17.3	13.8	72.1
15A × 8A	21.7	13.8	72.1
15A × 10A	21.7	17.3	72.1
1.0S × 8A	25.4	13.8	76.1
1.0S × 10A	25.4	17.3	76.1
1.0S × 15A	25.4	21.7	76.1
1.25S × 1.0S	31.8	25.4	109.5
1.5S × 1.0S	38.1	25.4	109.0
1.5S × 1.25S	38.1	31.8	109.0
2.0S × 1.0S	50.8	25.4	109.0
2.0S × 1.25S	50.8	31.8	109.5
2.0S × 1.5S	50.8	38.1	109.0
2.5S × 1.0S	63.5	25.4	109.0
2.5S × 1.25S	63.5	31.8	109.5
2.5S × 1.5S	63.5	38.1	109.0
2.5S × 2.0S	63.5	50.8	109.0
3.0S × 1.5S	76.3	38.1	109.0
3.0S × 2.0S	76.3	50.8	109.0
3.0S × 2.5S	76.3	63.5	109.0
3.5S × 2.0S	89.1	50.8	109.5
3.5S × 2.5S	89.1	63.5	109.5
3.5S × 3.0S	89.1	76.3	109.5
4.0S × 2.0S	101.6	50.8	144.0
4.0S × 2.5S	101.6	63.5	144.0
4.0S × 3.0S	101.6	76.3	144.0
4.0S × 3.5S	101.6	89.1	144.5


サイズ表														(単位 mm)
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1/(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP (電解研磨品) / 酸洗品もご用意させて頂きます。

※ 1.65も対応可能です。

片ヘルール付 偏芯レデューサー

Reducer ends Ferrule / Weld (Eccentric)

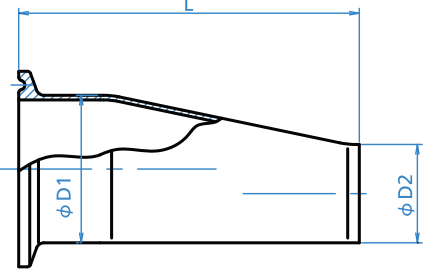


※ 寸法表以外のサイズも製作致します。

SIZE	Ø D1	Ø D2	L
10A × 8A	17.3	13.8	55.1
15A × 8A	21.7	13.8	55.1
15A × 10A	21.7	17.3	55.1
1.0S × 8A	25.4	13.8	59.1
1.0S × 10A	25.4	17.3	59.1
1.0S × 15A	25.4	21.7	59.1
1.25S × 1.0S	31.8	25.4	88.5
1.5S × 1.0S	38.1	25.4	88.0
1.5S × 1.25S	38.1	31.8	88.0
2.0S × 1.0S	50.8	25.4	88.0
2.0S × 1.25S	50.8	31.8	88.0
2.0S × 1.5S	50.8	38.1	88.0
2.5S × 1.0S	63.5	25.4	88.0
2.5S × 1.25S	63.5	31.8	88.0
2.5S × 1.5S	63.5	38.1	88.0
2.5S × 2.0S	63.5	50.8	88.0
3.0S × 1.5S	76.3	38.1	88.0
3.0S × 2.0S	76.3	50.8	88.0
3.0S × 2.5S	76.3	63.5	88.0
3.5S × 2.0S	89.1	50.8	88.5
3.5S × 2.5S	89.1	63.5	88.5
3.5S × 3.0S	89.1	76.3	88.5
4.0S × 2.0S	101.6	50.8	123.0
4.0S × 2.5S	101.6	63.5	123.0
4.0S × 3.0S	101.6	76.3	123.0
4.0S × 3.5S	101.6	89.1	123.0

片ヘルール付 偏芯レデューサー

Reducer ends Weld / Ferrule (Eccentric)

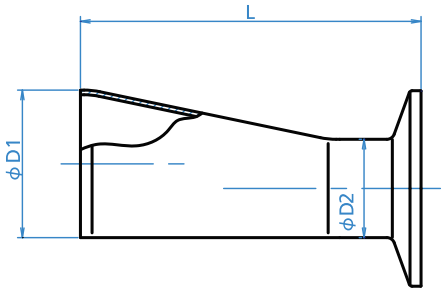

※ 寸法表以外のサイズも製作致します。

SIZE	Ø D1	Ø D2	L
10A × 8A	17.3	13.8	55.1
15A × 8A	21.7	13.8	55.1
15A × 10A	21.7	17.3	55.1
1.0S × 8A	25.4	13.8	55.1
1.0S × 10A	25.4	17.3	55.1
1.0S × 15A	25.4	21.7	55.1
1.25S × 1.0S	31.8	25.4	88.0
1.5S × 1.0S	38.1	25.4	88.0
1.5S × 1.25S	38.1	31.8	88.5
2.0S × 1.0S	50.8	25.4	88.0
2.0S × 1.25S	50.8	31.8	88.0
2.0S × 1.5S	50.8	38.1	88.0
2.5S × 1.0S	63.5	25.4	88.0
2.5S × 1.25S	63.5	31.8	88.5
2.5S × 1.5S	63.5	38.1	88.0
2.5S × 2.0S	63.5	50.8	88.0
3.0S × 1.5S	76.3	38.1	88.0
3.0S × 2.0S	76.3	50.8	88.0
3.0S × 2.5S	76.3	63.5	88.0
3.5S × 2.0S	89.1	50.8	88.0
3.5S × 2.5S	89.1	63.5	88.0
3.5S × 3.0S	89.1	76.3	88.0
4.0S × 2.0S	101.6	50.8	123.0
4.0S × 2.5S	101.6	63.5	123.0
4.0S × 3.0S	101.6	76.3	123.0
4.0S × 3.5S	101.6	89.1	123.5


サイズ表														(単位 mm)
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1/(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP (電解研磨品) / 酸洗品もご用意させて頂きます。

※ 1.65も対応可能です。

溶接式 ヘルール

Ferrule for Welding

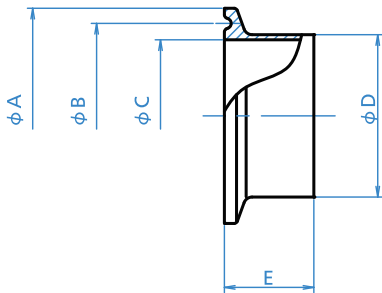


(単位 mm)

SIZE	ØD	ØA	ØB	ØC	E
8A	13.8	34.0	27.5	10.5	17.0
10A	17.3	34.0	27.5	14.0	17.0
15A	21.7	34.0	27.5	17.5	17.0
1.0S	25.4	50.5	43.5	23.0	21.0
1.25S	31.8	50.5	43.5	29.4	21.5
1.5S	38.1	50.5	43.5	35.7	21.0
2.0S	50.8	64.0	56.5	47.8	21.0
2.5S	63.5	77.5	70.5	59.5	21.0
3.0S	76.3	91.0	83.5	72.3	21.0
3.5S	89.1	106.0	97.0	85.1	21.5
4.0S	101.6	119.0	110.0	97.6	21.0

溶接式 ロングヘルール

Long Ferrule for Welding

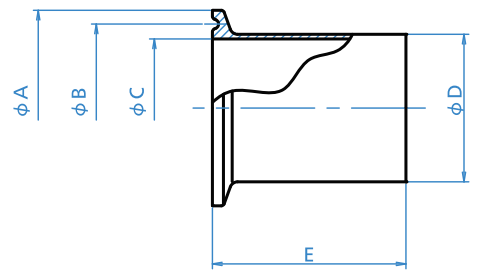


(単位 mm)

SIZE	ØD	ØA	ØB	ØC	E
1.0S	25.4	50.5	43.5	23.0	42.0
1.25S	31.8	50.5	43.5	29.4	42.0
1.5S	38.1	50.5	43.5	35.7	42.0
2.0S	50.8	64.0	56.5	47.8	42.0
2.5S	63.5	77.5	70.5	59.5	42.0
3.0S	76.3	91.0	83.5	72.3	42.0
3.5S	89.1	106.0	97.0	85.1	42.0
4.0S	101.6	119.0	110.0	97.6	42.0

ヘルールキャップ

Ferrule Cap



(単位 mm)

SIZE	ØD	ØA	ØB
15A	21.7	34.0	27.5
1.5S	38.1	50.5	43.5
2.0S	50.8	64.0	56.5
2.5S	63.5	77.5	70.5
3.0S	76.3	91.0	83.5
3.5S	89.1	106.0	97.0
4.0S	101.6	119.0	110.0

※8A～15A共有、1.0S～1.5S共有

サイズ表

(単位 mm)

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)


表面仕上：内外面バフ研磨品 その他、EP (電解研磨品) / 酸洗品もご用意させていただきます。

※1.65も対応可能です。

15

溶接式 ライナー

Liner for Welding




(単位 mm)

SIZE	ØD	ØC	E
1.0S	25.4	23.0	21.0
1.5S	38.1	35.7	21.0
2.0S	50.8	47.8	21.0
2.5S	63.5	59.5	21.0
3.0S	76.3	72.3	21.0
4.0S	101.6	97.6	27.5

ライナーキャップ

Liner Cap




(単位 mm)

SIZE	A	E
1.0S	33.8	10.0
1.5S	47.0	10.0
2.0S	60.5	10.0
2.5S	74.0	10.0
3.0S	87.5	10.0
4.0S	114.5	10.0

溶接式 ネジスリーブ

Male for Welding




(単位 mm)

SIZE	ØD	ØC	E
1.0S	25.4	23.0	21.0
1.5S	38.1	35.7	21.0
2.0S	50.8	47.8	21.0
2.5S	63.5	59.5	21.0
3.0S	76.3	72.3	21.0
4.0S	101.6	97.6	27.5

六角ナット

Hexagon Nut



(単位 mm)

SIZE	A	E
1.0S	46.0	30.0
1.5S	56.0	30.0
2.0S	71.0	30.0
2.5S	85.0	30.0
3.0S	100.0	30.0
4.0S	136.0	38.0

サイズ表

(単位 mm)

呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)

表面仕上：内外面バフ研磨品 その他、EP (電解研磨品) / 酸洗品もご用意させていただきます。


※1.65も対応可能です。

Sanitary Fittings

16

2Kクランプ

2K Clamp

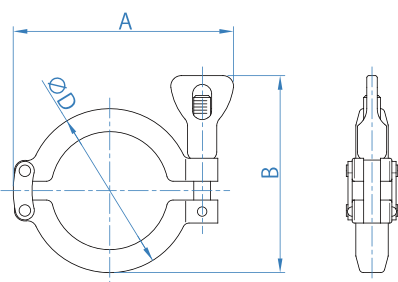


SIZE	ØD	A	B
15A	45.0	74.0	59.0
1.5S	66.0	97.0	89.0
2.0S	79.0	109.0	95.0
2.5S	94.0	123.0	103.0
3.0S	107.0	136.0	108.0
4.0S	132.0	162.0	121.0

8A~15A兼用 1.0S~1.5S兼用

材質:SUS304相当

3Kクランプ

3K Clamp

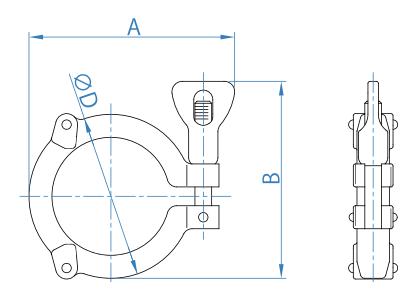


SIZE	ØD	A	B
1.5S	66.0	86.0	89.0
2.0S	79.0	100.0	95.0
2.5S	94.0	115.0	103.0
3.0S	107.0	128.0	108.0
4.0S	132.0	154.0	121.0
4.5S	144.8	172.0	149.0
5.5S	171.0	195.0	136.0

1.0S~1.5S兼用

材質:SUS304相当

2Dクランプ

2D Clamp

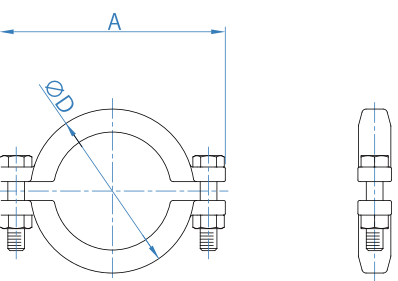


SIZE	ØD	A
15A	46.0	67.0
1.5S	66.0	96.0
2.0S	80.0	113.0
2.5S	96.0	125.0
3.0S	107.0	139.0
4.0S	135.0	167.0

8A~15A兼用 1.0S~1.5S兼用

材質:SUS304相当


マンホールクランプ

Man-hole Clamp

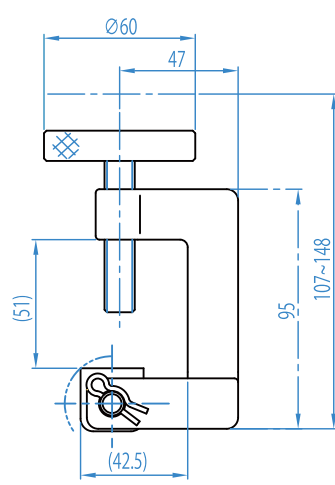

※図のワンサイズのみとなります。

Information



2Dクランプには、側孔型クランプバンド「CHECK CLAMP」もご用意しています。

※CHECK CLAMPは当社オリジナル商品です。


同商品の詳細はこちら。




17

パイプハンガー

Pipe Hanger

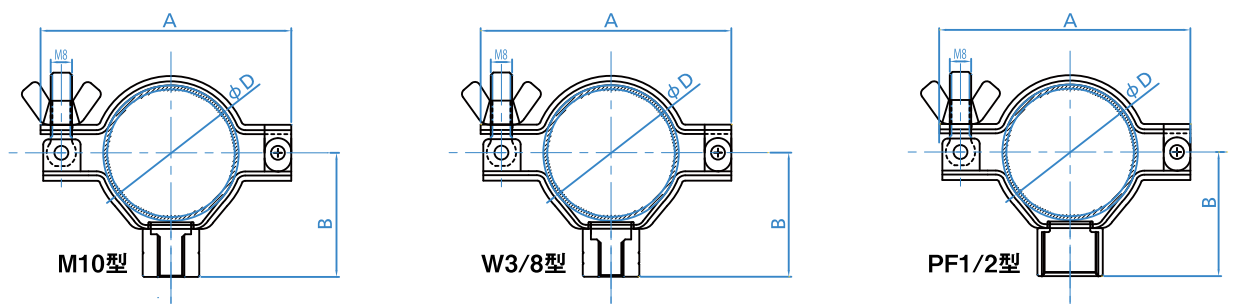

※8A~15Aは右図の形状になります
・材質SUS304



小口径型

SIZE	ØD	A	B
8A	13.8	42.0	25.0
10A	17.3	47.0	25.0
15A	21.7	53.0	25.0
1.0S	25.4	60.0	34.4
1.5S	38.1	75.0	40.0
2.0S	50.8	94.0	46.5
2.5S	63.5	113.0	54.2
3.0S	76.3	125.0	59.6
4.0S	101.6	150.0	72.3


ヘルールガスケット

Ferrule Gasket

PTFE材ヘルールガスケットの耐熱温度について

推奨使用温度：100℃
最高使用温度：150℃

※100℃以上で使用される場合は、定期的な増し締めが必要です。
※高温での使用は低温に比べて寿命も短くなります。




SIZE	A
8A	34.0
10A	34.0
15A	34.0
1.0S	50.5
1.25S	50.5
1.5S	50.5
2.0S	64.0
2.5S	77.5
3.0S	91.0
3.5S	106.0
4.0S	119.0

・材質：NBR/EPDM/シリコン/PTFE/FKM/サニクリーン
・材質：NBR/EPDM/シリコン/PTFE/バイトン/サニクリーン

L型ガスケット

L-type Gasket



SIZE	A
1.0S	32.5
1.5S	46.0
2.0S	59.5
2.5S	73.2
3.0S	86.5
4.0S	112.5

・材質：NBR/EPDM/シリコン/PTFE/バイトン/サニクリーン

サイズ表

	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
呼び径	8A	10A	15A	1.0S	1.25S	1.5S	2.0S	2.5S	3.0S	3.5S	4.0S	4.5S	5.5S	6.5S
外 径	13.8	17.3	21.7	25.4	31.8	38.1	50.8	63.5	76.3	89.1	101.6	114.3	139.8	165.2
肉 厚	1.65	1.65	2.1/(※1.65)	1.2	1.2	1.2	1.5	2.0	2.0	2.0	2.0	3.0	3.0	3.0

材 質：SUS304 / SUS316L (SIZE 8A 10A 15AはSUS316Lのみとなります)
表面仕上：内外面バフ研磨品 その他、EP(電解研磨品) / 酸洗品もご用意させて頂きます。

※1.65も対応可能です。

Sanitary Fittings

18